





Names and Functions of Parts

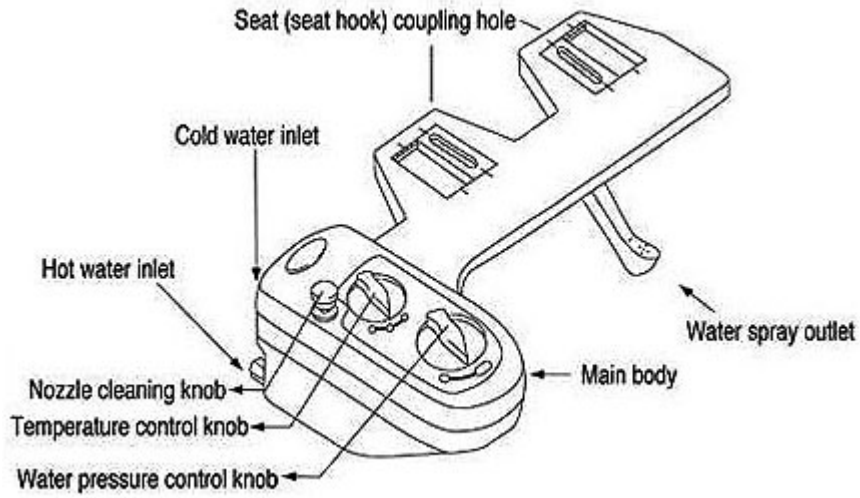

Hot Water Adapter



Cold Water Adapter



Flexible Hose

Connecting cold water line from bidet to cold water adapter cut white tube to cold water adapter Remaining hose from hot water line to hot water adapter



White Tube



Wrench




Teflon tape



Screwdriver (flat)


Installation Tools Needed

Trouble Shooting

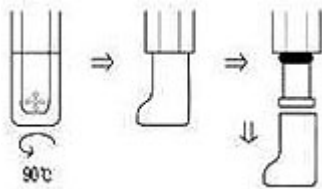

If you spray outlet hole is clogged, you can remove the spray outlet by turning it 90 degree counter clockwise and pulling it down. After cleaning it, put it back and

Spray Angle



You can select two different water spray angles by pulling the spray outlet tip up or pushing it back as illustrated.

turn 90 degree clockwise to lock.

Cold Water Line




1. Preparation

- Remove the existing toilet seat
- Turn off the water valve
- Flush toilet to drain tank completely
- Take out existing water pipe




2. Installation

- Install adapter beneath water tank
- Connect white water tube into adapter nipple
- Install main body



Hot Water Line

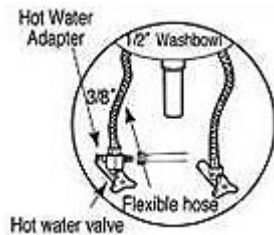

Hot water line to be connected to the tube to the hot water line of sink water line, as same procedure of cold water connection. Make sure the hot water tube is connected to the hot water inlet of **Pilot Bidet®**

Trying your **Pilot Bidet®** for the First Time

Congratulations!! You are ready to use the **Pilot Bidet®** for the first time. Be sure to turn water pressure control knob gently until reaching your desired pressure. Water pressure control device is only to control water pressure, not for setting up the duration of water spray.

